

■ 特性 Features:

- 可通过开关选择输入电压范围: 90-132Vac/180-264Vac/250-370Vdc

The input voltage range can be selected through the switch: 90-132Vac/180-264Vac/250-370Vdc

- 工作温度高达 70℃

Operating temperature up to 70℃

- 4242Vdc 高隔离电压

4242Vdc high isolation voltage

- 输出低纹波噪声

Low ripple & noise output

- 电源输出 LED 指示灯

PSU output LED indicator

- 输出电压值可调

The output voltage is adjustable

- 内置直流风扇强制风冷

Built-in DC fan forced air cooling

- 输出短路、过流、过压、过温保护功能

With OSP、OCP、OVP、OTP functions

- 满足 5000M 海拔应用 (备注 3)

Meet 5000M altitude application (Note 3)

- 100%高温老化

100% high temperature burn-in test

- 满足 5G 振动测试

Meet 5G vibration test

- 符合 IEC/EN/UL62368、GB4943、GB/T9254 等认证标准

Comply with IEC/EN/UL62368, GB4943, GB/T9254 Etc.certification standards

- 输出双重过压保护 (可选)

Output double OVP (optional)

- 高可靠性, 基板三防漆工艺

High reliability, substrate three anti-paint process

**■ 应用 Applications:**

- 工业控制或自动化装置

Industrial control or automation devices

- 电子仪器, 设备和装置

Electronic instruments, equipment and devices

- 机械和电气设备

Mechanical and electrical equipment

- 老化设备

Aging equipment

■ 描述 Description:

ERS-350CW 系列是一款 350W 单组输出 AC 转 DC 电源, 采用 115VAC 或 230VAC 输入(通过开关选择), 整系列提供 5V, 8.5V, 12V, 15V, 24V, 27V, 36V 和 48V 直流隔离输出; 30mm 极薄外型设计, 具有完整的保护功能, EMC 性能好, 高可靠性, 高性价比, 安全隔离等优点。产品符合 IEC/UL/EN/BS EN62368、GB4943、EN62477 等国际安全法规, 符合欧盟 RoHS2.0 指令, 是一款极具性价比的工业电源。

ERS-350CW series is a 350W single output AC to DC PSU, Adopting the input of 115VAC or 230VAC(select by switch), The whole series provides 5V, 8.5V, 12V, 15V, 24V, 27V, 36V and 48V DC isolated output; Advantages such as 30mm extremely thin design; With complete protection function; Excellent EMC performance, high reliability, high cost performance, security isolation and so on. Products comply with IEC/UL/EN/BS EN62368、GB4943、EN62477 international safety standards and EU RoHS2.0 directive; It is a cost-effective industrial PSU.

选型规格 Model Selection

功率段 POWER	产品型号 MODEL	输出功率 Pout	输入电压 Vin	输出电压 Vout	输出电流 Iout	效率(%) EFF.	安规认证 SAFETY
350W	GW-ERS350CW-5	250W	90-132Vac/ 180-264Vac/ 250-370Vdc	5V	50A	82.5	CQC, CE
	GW-ERS350CW-8.5	297.5W		8.5V	35A	84.0	
	GW-ERS350CW-12	350.4W		12V	29.2A	86.0	
	GW-ERS350CW-15	351W		15V	23.4A	88.0	
	GW-ERS350CW-24	350.4W		24V	14.6A	88.0	
	GW-ERS350CW-27	351W		27V	13A	88.0	
	GW-ERS350CW-36	352.8W		36V	9.8A	88.0	
	GW-ERS350CW-48	350.4W		48V	7.3A	87.5	

*其它安规需求认证中 Other safety requirements are pending certification.



通用参数 General Specification

型号 MODEL		ERS350C W-5	ERS350CW -8.5	ERS350C W-12	ERS350C W-15	ERS350C W-24	ERS350C W-27	ERS350C W-36	ERS350 CW-48
输出 Output	输出电压 Output Voltage	5V	8.5V	12V	15V	24V	27V	36V	48V
	额定电流 Output Current	50A	35A	29.2A	23.4A	14.6A	13A	9.8A	7.3A
	电流范围 Current Range	0~50A	0~35A	0~29.2A	0~23.4A	0~14.6A	0~13A	0~9.8A	0~7.3A
	额定功率 Output Power	250W	297.5W	350.4W	350.1W	350.4W	351W	352.8W	350.4W
	纹波与噪声 Ripple and Noise(备注6)	130mV	130mV	130mV	150mV	150mV	150mV	200mV	200mV
	电压调整范围 Adj-voltage range	4.8~5.3V	7.6~9.4V	11.2~13.2V	13.5~16.1V	21.9~26.6V	25.2~30.6V	33.6~39V	43.7~53.7V
	稳压精度 Voltage stability(备注2)	±3.0%	±2.0%	±1.5%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%

	线性调整率 Line regulation	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	负载调整率 Load regulation	±2.0%	±2.0%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	保持时间 Hold-up time	16ms (230Vac/100% load), 12ms (115Vac/100% load)							
	启动时间 Startup time	≤3s (115Vac/230Vac ; 100% load)							
输入 Input	电压范围 Voltage Range	90~132Vac / 180~264Vac (需通过开关选择, 开关设置在 230V Select by switch, switch on 230Vac)							
	频率范围 Frequency Range	47~63Hz							
	输入电流 Input Current	8A / 100Vac, 4A / 200Vac							
	浪涌电流 Inrush Current	70A, 115Vac/230Vac, Cold start							
	效率 Efficiency	82.5%	84.0%	86.0%	88.0%	88.0%	88.0%	88.0%	87.5%
保护 Protections	过电压 OVP	5.8~8.7V	9.4~13.6V	13.2~16.8V	17~23V	27~33V	30.6~38V	39~48V	55~65V
	过负载 OCP	55~80A	40~52.5A	32.1~46.7A	26~36A	16~25A	15~20A	11~17A	9~15A
	过温度 OTP	打嗝模式, 异常条件移除后可自动恢复 Hiccup mode, The PSU can be Auto-recovered when the fault is removed							
	短路 OSP	打嗝模式, 异常条件移除后可自动恢复 Hiccup mode, The PSU can be Auto-recovered when the fault is removed							
环境 Environmental	工作温度 Operating Temperature	-25 ~ +70℃ 请参考降额曲线 Refer to the derating curve							
	工作湿度 Operating Humidity	20% ~ 90% RH, 无冷凝 Non-condensing							
	存储温度 Storage Temperature	-40 ~ +85℃							
	存储湿度 Storage humidity	5% ~ 95% RH, 无冷凝 Non-condensing							
安规 Safety	安全规范 safety standards	IEC/UL/EN/BS EN62368、GB4943、EN62477							
	耐压 Hi-pot	I/P - O/P: 3000Vac/4242Vdc; I/P - FG: 1500Vac/2121Vdc; O/P - FG: 500Vac/707Vdc							
	绝缘阻抗 Insulating resistance	≥100Mohm (500VDC / 25℃ / 90% RH)							
	泄漏电流 Leakage Current	<1.5mA / 240Vac							
	电磁兼容发射	IEC/EN55032 (CISPR32) Class A, IEC/EN55014, IEC/EN61000-3-3, GB/T9254, CNS15936, KN32							
	电磁兼容抗扰度	IEC/EN61000-4-2, 3, 4, 5, 6, 8, 11, IEC/EN61000-6-2, IEC/EN50082-2, IEC/EN55035, KN35							
其它	质保期 Warranty	3Years							


Others	MTBF	Telcordia SR-332 (Bellcore) $\geq 500K$ hrs
	尺寸 SIZE	215mm * 115mm * 30mm (L * W * H)
	包装 Packing	0.654KG; 15PCS/Box
备注 Remark	1. 如未特别说明, 所有规格参数均在输入为 230Vac, 额定负载, 25℃环境温度下进行测量, 详见测试报告。 Unless otherwise specified, all spec. are measured at 230Vac, rated load, $T_a=25^{\circ}C$, Please refer to the test report. 2. 输出电压的精度包含设定误差、线性调整率和负载调整率 The voltage stability includes setting error, linear regulation and load regulation 3. 当产品工作于海拔 2000m 以上时, 环境温度需降额 $1^{\circ}C/200m$ When the power supply is working above an altitude of 2000m, the T_a must be derated by $1^{\circ}C/200m$ 4. 此电源不符合 EN61000-3-2 规定的谐波电流要求, 请不要在以下条件下使用此电源: a) 安装在平均或连续输入功率大于 75W 的终端设备或照明系统中; b) 终端设备在欧盟内使用; c) 终端设备连接到 220Vac 或更高额定标称电压的公共主电源。 This power supply does not meet the harmonic current requirements specified in EN61000-3-2. Please do not use this power supply under the following conditions: a) Installed in terminal equipment or lighting systems with an average or continuous input power greater than 75W; b) Terminal devices used within the European Union; c) The terminal device is connected to a common main power supply with a rated voltage of 220Vac or higher. 5. 产品在任何稳态工作条件下, 总功率不应超出标示的额定功率且输出电流不应超出额定输出电流。 Under any operating conditions, the total power should not exceed the rated power indicated and the output current should not exceed the rated output current. 6. 纹波和噪声的测试方法采用双绞线连接, 输出并联 47uF 低 ESR 电容和 0.1uF 陶瓷电容, 在 20MHz 带宽下进行量测。 The test method of ripple and noise is connected by twisted pair, the output is in parallel with 47uF low ESR capacitor and 0.1uF ceramic capacitor, and the measurement is carried out at 20MHz bandwidth. *产品免责声明: 产品最终解释权归长城电源技术有限公司所有 详细请参阅网址 https://www.gwpst.com *Disclaimer: The final interpretation rights of the product belong to Great Wall Power Supply Technology Co., Ltd. Details please refer to https://www.gwpst.com	

■ 降额曲线 Derating Curve

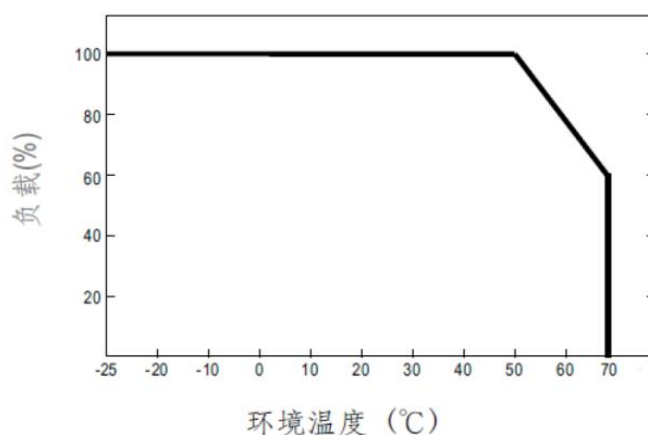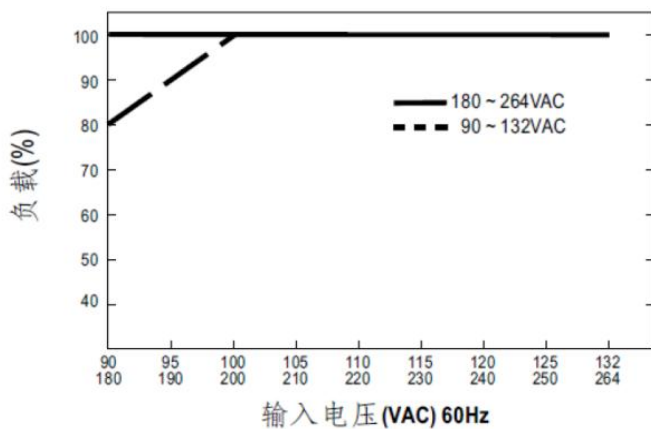

结构参数 Mechanical Overview

■ 结构尺寸 Shape Size

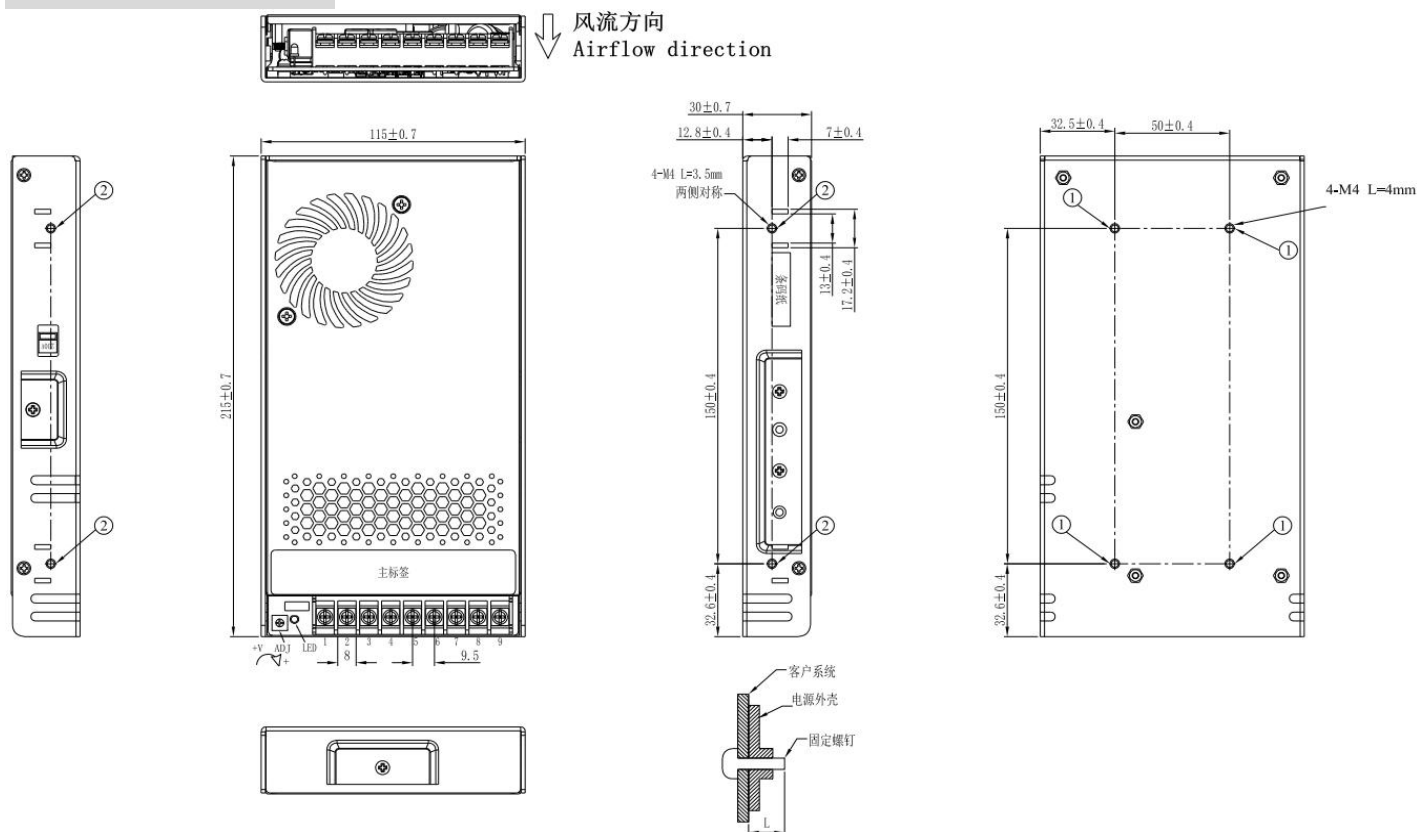


端子引脚描述 Terminal PIN Description

引脚编号 Pin number	1~3	4~6	7	8	9
引脚功能 Pin Feature	Vout +	Vout -	FG	AC/N	AC/L

孔编号	推荐螺丝型号	最大穿孔深度 L	推荐安装扭矩
①	M4	4mm	7~10Kgf.cm
②	M4	3.5mm	7~10Kgf.cm

■ 方框图 Block Diagram

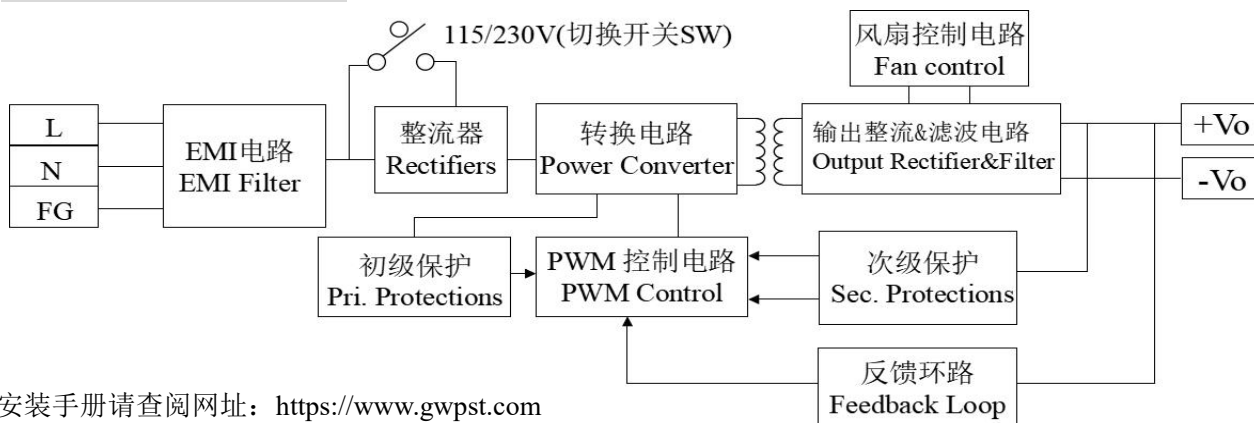

* 安装手册请查阅网址: <https://www.gwpst.com>

* Installation manual, please refer to web.: <https://www.gwpst.com>